Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

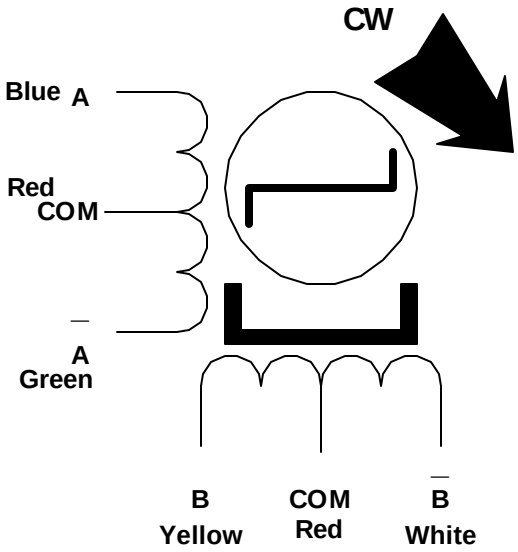

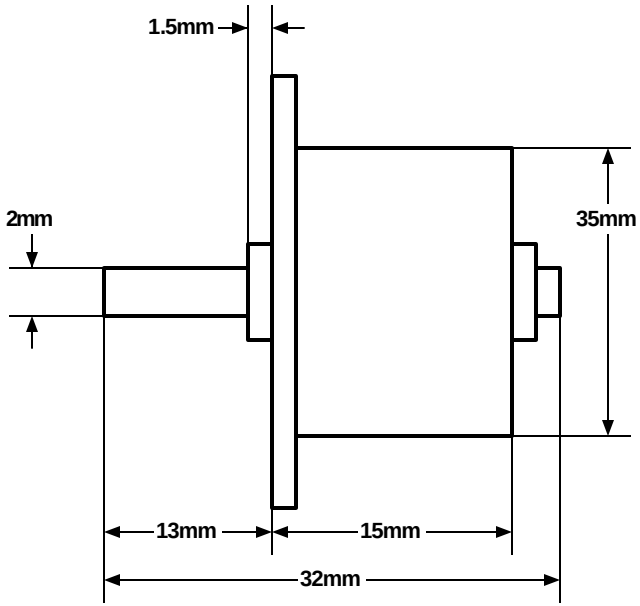

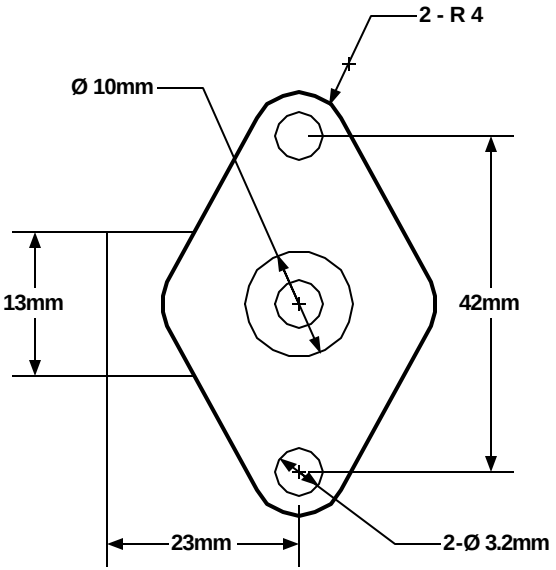

Step Angle: 7.5^0
No. of Phase: 4
Voltage: 5V
Current: 500mA
Resistance: 10 ohms
Inductance: 65mH
Holding Torque: 250 g.cm
Detent Torque: 65 g.cm
Rotor Inertia: 2.5 $g.cm^2$
Leadwires: UL1007, 26AWG

PM Step Motor **35BY48B06**	**Jameco Part Number 237673**
	SIZE / FSCM NO / DWG NO / REV
	SCALE / SHEET